



PLAN

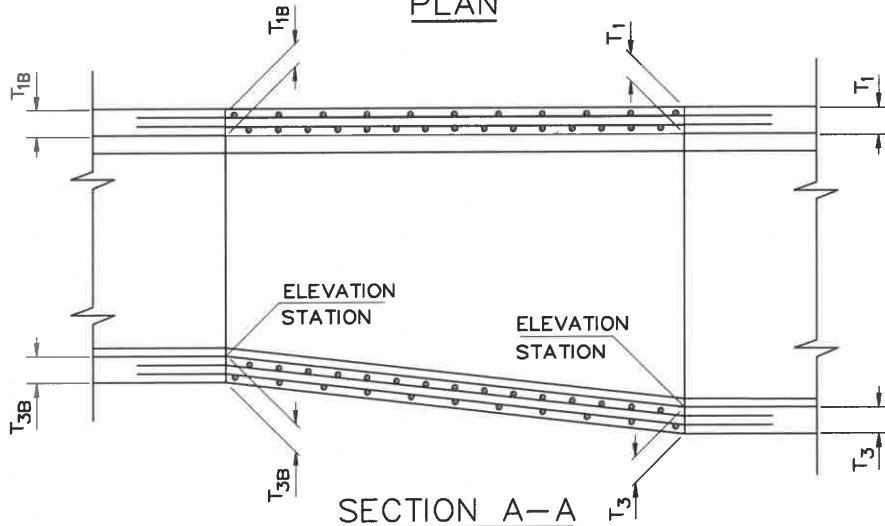

SECTION A-A

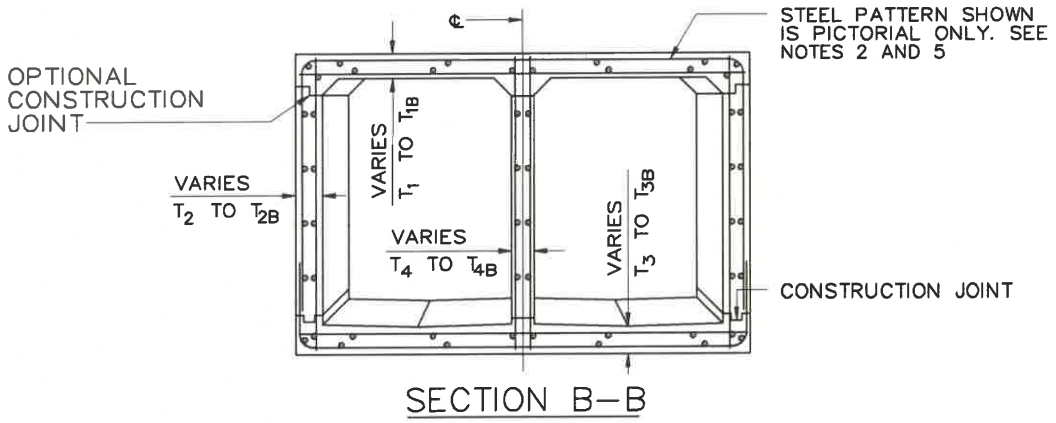

SECTION B-B

TRANSITION STRUCTURE DOUBLE RCB TO DOUBLE RCB



REVISIONS			
No.	DATE	No.	DATE

[Signature]
CITY ENGINEER

9/27/22
DATE

[Signature] 10/12/23
DIRECTOR OF PUBLIC WORKS DATE

STANDARD DETAIL
344
SHEET 1 OF 2

DEPARTMENT OF PUBLIC WORKS


NOTES

1. HORIZONTAL ANGLE OF DIVERGENCE OR CONVERGENCE, θ , SHALL NOT EXCEED 5° 45'.
2. REINFORCING STEEL BAR SIZE, SPACING, LENGTHS, AND OUTSIDE COVER SHALL BE THAT OF WHICHEVER ADJOINING DOUBLE RCB SECTION PROVIDES THE GREATER STEEL AREA FOR EACH TYPE OF BAR. LONGITUDINAL BARS SHALL BE CONTINUED THROUGH THE JOINTS WITH THE TRANSITION STRUCTURE.
3. THE THICKNESS OF THE WALLS AND SLABS SHALL BE THOSE OF THE ADJOINING DOUBLE RCB SECTION AT EACH END OF THE TRANSITION AND SHALL VARY UNIFORMLY BETWEEN THE TWO ENDS.
4. $f'_c = 4,000$ PSI AT 28 DAYS AND THE CONCRETE SHALL BE THE SAME MIX AS THE ADJACENT RCB.
5. ALL STEEL, EXCEPT LONGITUDINAL STEEL SHALL BE GRADE 60 BILLET STEEL CONFORMING TO ASTM A 615 AND SHALL TERMINATE 1 1/2" CLEAR OF CONCRETE SURFACE UNLESS OTHERWISE SHOWN.
6. TRANSVERSE JOINT KEYWAYS, AS DETAILED FOR LONGITUDINAL JOINT KEYWAYS AT BASE OF OUTER WALLS ON THE PLANS, SHALL BE PLACED IN BOTH SLABS AND WALLS AT THE END OF EACH POUR.
7. THE TRANSITION STRUCTURE SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE STRUCTURAL NOTES APPLYING TO DOUBLE RCB STRUCTURES SHOWN ON THE PLANS.

TRANSITION STRUCTURE DOUBLE RCB TO DOUBLE RCB



REVISIONS			
No.	DATE	No.	DATE



 CITY ENGINEER

9/27/23

 DATE

 10/12/23

 DIRECTOR OF PUBLIC WORKS DATE

STANDARD DETAIL
344
 SHEET 2 OF 2

DEPARTMENT OF PUBLIC WORKS